

537,079

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



01 JUN 2005



(43) International Publication Date
1 July 2004 (01.07.2004)

PCT

(10) International Publication Number
WO 2004/054711 A1

(51) International Patent Classification⁷:
C08F 4/651, 4/654, 10/00

B01J 27/00,

(74) Agent: **COLUCCI, Giuseppe**; Basell Poliolefine Italia
S.P.A., Intellectual Property, P.le G. Donegani 12, 44100
Ferrara (IT).

(21) International Application Number:

PCT/EP2003/013818

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:

25 November 2003 (25.11.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

02080616.2	18 December 2002 (18.12.2002)	EP
60/435,195	20 December 2002 (20.12.2002)	US
03101357.6	14 May 2003 (14.05.2003)	EP
60/482,697	26 June 2003 (26.06.2003)	US

(84) Designated States (*regional*): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **BASELL
POLIOLEFINE ITALIA S.P.A.** [IT/IT]; Via Pergolesi 25,
I-20124 Milano (IT).

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **BRITA, Diego**
[IT/IT]; Via Mulinetto, 63, I-44100 Ferrara (IT).
CASALINI, Andrea [IT/IT]; Via Marzabotto 16, 40133
Bologna (IT). **EVANGELISTI, Daniele** [IT/IT]; Via del
Campo, 28, I-44100 Ferrara (IT). **FUSCO, Ofelia** [IT/IT];
Via Mulinetto, 63, I-44100 Ferrara (IT). **COLLINA,
Gianni** [IT/IT]; Via XXI Aprile 1945, 3, Loc. Cassana,
I-44044 Ferrara (IT).

Published:

— *with international search report*
— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: **MAGNESIUM DICHLORIDE-BASED ADDUCTS AND CATALYST COMPONENTS OBTAINED THEREFROM**

(57) Abstract: Solid Lewis adducts comprising $MgCl_2$, a Lewis base (LB) belonging to ethers, esters, ketones, silanes or amines and an alcohol ROH, in which R is a C 1-C 15 hydrocarbon group optionally substituted with heteroatoms containing groups, which compounds are in molar ratios to each other defined by the following formula $MgCl_2(ROH)_m(LB)_n$ in which m ranges from 0.05 to 6, n ranges from 0.08 to 6. These adducts allow to prepare catalysts having a good morphological stability and high polymerization activities.

WO 2004/054711 A1

TITLE:**“Magnesium dichloride-based adducts and catalyst components obtained therefrom”**

The present invention relates to Lewis adducts comprising magnesium dichloride, an alcohol and another Lewis base in specific amounts. The adducts of the present invention are particularly useful as precursors of Ziegler-Natta catalyst components for the polymerization of olefins.

The modern ZN catalysts including titanium compounds supported on magnesium halides are well known in the art. Catalysts of this type are described in the U.S. patent No.4,298,718. Said catalysts comprise titanium tetrahalides supported on halides of magnesium. Although the catalysts have high activity in the polymerization of alpha olefins like propylene, they are not very stereospecific. Improvements to stereospecificity have been made by adding electron-donor compounds to the solid catalyst component.

Substantial improvements were obtained by using, in addition to the electron-donor present in the solid component, an electron-donor (external) added to the aluminium alkyl co-catalyst component or the polymerization reactor.

The catalysts modified in this manner although being highly stereospecific (Isotactic Index about 94-95%) still did not show sufficiently high levels of activity.

Significant improvements in both activity and stereospecificity were obtained by preparing the solid catalytic component according to the technique described in U.S. patent No.4,226,741.

High level performance in catalyst activity, as well as stereospecificity, have been obtained with the catalysts described in the European patent No.045977. Said catalysts have as solid catalysts component, a magnesium halide on which is supported a titanium halide, preferably TiCl_4 , and an electron-donor compound, selected from specific classes of carboxylic acid esters, and, as co-catalyst component, a system formed of an Al-trialkyl compound and a silicon compound containing at least one Si-OR bond (R hydrocarbyl radical).

Nevertheless the results described above, research activities have been continued with the purpose of modifying and/or improving the performance of the mentioned catalysts.

The European patent No.0361494 and EP 728769 describe very active solid catalyst components for the polymerization of olefins comprising, as an internal electron-donor compound, a 1,3-diether characterized by a specific structure and/or by specific reactivity characteristics toward the anhydrous magnesium chloride and TiCl_4 .

The catalysts obtained from the reaction of said catalyst components with an Al-alkyl compound exhibit a so high activity and stereospecificity in the polymerization of olefins, that

the use of an external electron-donor can be avoided.

It is also desirable that the catalyst be characterized by a good morphological stability so as to avoid or limit the formation of fine particles that can cause problems to the polymerization plant operation. Improvements in this aspect have been obtained by using Ziegler-Natta catalysts disclosed in EP 395083 obtained by contacting a titanium compound, optionally an electron donor compound (a phthalate), with a $\text{MgCl}_2 \bullet (\text{EtOH})_m$ in which m is from 0.15 to 1.7 that has been in turn obtained by partial dealcoholation of adducts with a higher alcohol content. This approach, although generally effective, is not particularly suitable for the catalysts including 1,3-diethers as internal donor because the performances of the catalysts worsen to a level which, in some cases, makes the use of 1,3 diethers as internal donor no longer effective. It would be therefore important to find a way of generating a catalyst having a good morphological stability and high activities even when a 1,3-diether is used as internal donor. The applicant has now found that the above-mentioned problem can be solved by the use of special precursors of the catalysts.

The present invention therefore relates to solid Lewis adducts comprising MgCl_2 , a Lewis base (LB) belonging to ethers, esters, ketones, silanes or amines and an alcohol ROH, in which R is a C1-C15 hydrocarbon group optionally substituted with heteroatoms containing groups, which compounds are in molar ratios to each other defined by the following formula $\text{MgCl}_2(\text{ROH})_m(\text{LB})_n$ in which m ranges from 0.05 to 6, n ranges from 0.08 to 6.

Preferably, the LB is selected from ethers, esters and ketones, more preferably from ethers and esters and in particular from ethers.

Preferred ethers are the C2-C20 aliphatic ethers and in particular cyclic ethers preferably having 3-5 carbon atoms such as tetrahydrofuran, dioxane. Also suitable are the linear or cyclic aliphatic ethers having two or more ether groups. Preferred esters are the alkyl esters of C1-C10 aliphatic carboxylic acids and in particular C1-C4 alkyl esters of aliphatic mono carboxylic acids such as ethylacetate and methyl formate.

Preferred R groups are C1-C10 saturated hydrocarbon groups, in particular methyl, ethyl and C3-C8 alkyl groups. Specific examples of ROH alcohols according to the invention are methanol, ethanol propanol, isopropanol, n-butanol, i-propanol, sec-butanol, tert-butanol, pentanol, 2-methyl-1-pentanol, 2-ethyl-1-hexanol, phenol, 4-methyl-1-phenol, 2,6-dimethyl-1-phenol, cyclohexanol, cyclopentanol. Methanol, n-butanol, sec-butanol, i-propanol, and 2-methyl-1-pentanol are preferred. Ethanol is especially preferred.

Preferably m ranges from 0.1 to 4.5, more preferably from 0.5 to 4 and especially from 0.5 to

2.5.

Preferably n ranges from 0.07 to 3, more preferably from 0.1 to 2.5 and especially from 0.5 to 2.

The ratio (m/n) is generally higher than 0.4 and preferably higher than 0.5.

The Lewis adduct of the invention can contain also some water in a molar ratio defined by the formula $MgCl_2(ROH)_m(LB)_n(H_2O)_p$ in which the index p ranges from 0.01 to 0.6 and particularly from 0.01 to 0.4.

The adducts of the present invention can be prepared according to several methods. According to one of these methods the adducts can be prepared by contacting the desired amounts of $MgCl_2$, ROH and LB optionally in the presence of an inert liquid diluent, heating the system up to the melting temperature of the mixture and maintaining said conditions so as to obtain a completely molten adduct.

The said molten adduct can then be emulsified in a liquid medium which is immiscible with and chemically inert to it and finally quenched by contacting the adduct with an inert cooling liquid thereby obtaining the solidification of the adduct in substantially spherical particles. The liquid in which the molten adduct is emulsified can be any liquid immiscible with and chemically inert to the molten adduct. For example, aliphatic, aromatic or cycloaliphatic hydrocarbons can be used as well as silicone oils. Aliphatic hydrocarbons such as vaseline oil are particularly preferred.

An alternative embodiment the adduct of the invention is obtained in solid form by subjecting the molten adduct mentioned above to spray-cooling process. When this option is pursued it is preferred that in the first step the magnesium chloride, the alcohol and the electron donor compound be contacted to each other in the absence of an inert liquid diluent. After having been molten the adduct is sprayed, through the use of the proper devices that are commercially available, in an environment having temperature so low as to cause rapid solidification of the particles. The cold environment can comprise a cold liquid or gas. In a preferred aspect the adduct is sprayed in a cold liquid environment and more preferably in a cold liquid hydrocarbon.

Yet another method, which is preferred, for the preparation of the solid adducts of the invention comprises contacting the LB or ROH compound with a preformed solid $MgCl_2(ROH)_m$ or $MgCl_2(LB)_n$ adduct respectively. Preferably, the adduct is formed by contacting the LB compound with the desired amounts of $MgCl_2(ROH)_m$ adduct. The said contact can be carried out in liquid hydrocarbon medium under stirring conditions. It is also possible to add the LB


compound in a vapor phase, and particularly in a loop reactor as described in WO98/44009. It has been proved effective, and sometimes preferable, to the contact LB compound with $\text{MgCl}_2(\text{ROH})_m$ adducts, especially $\text{MgCl}_2(\text{EtOH})_m$, deriving from starting adducts in which part of the alcohol has been removed by physical (for example under a hot nitrogen stream) or chemical dealcoholation. These dealcoholated adducts and their preparation are described for example in EP395083 the relevant part of which is included by reference.

All these methods provide solid adducts having a substantially spherical morphology which are particularly suitable in the preparation of spherical catalyst components for the polymerization of olefins and in particular for the gas-phase polymerization process. With the term substantially spherical morphology are meant those particles having a ratio between the greater and smaller axis equal to or lower than 1.5 and preferably lower than 1.3.

As explained above, while water may be one of the constituents of the adduct too high levels of it should preferably be avoided. In doing that, it can be useful to control the water content of the reactants. In fact, MgCl_2 , and also certain ROH alcohol are highly hygroscopic and tend to incorporate water in their structure. As a result, if the water content of the reactants is relatively high, the final adducts may contain an undesired amount of water even if it has not been added as a separate component. Means for controlling or lowering the water content in solids or fluids are well known in the art. The water content in MgCl_2 can be for example lowered by drying it in an oven at high temperatures or by reacting it with a compound which is reactive towards water. As an example, a stream of HCl can be used to remove water from MgCl_2 . Water from the fluids can be removed by various techniques such as distillation or by allowing the fluids to become in contact with substances capable to subtract water such as molecular sieves.

As mentioned above these adducts can be advantageously used in the preparation of catalyst components for the polymerization of olefins. The said catalyst components can be obtained by contacting the adducts of the invention with compounds of transition metals belonging to one of the compound of one of the groups 4 to 6 of the Periodic Table of Elements (new notation). Among transition metal compounds particularly preferred are titanium compounds of formula $\text{Ti}(\text{OR})_n\text{X}_{y-n}$ in which n is comprised between 0 and y; y is the valence of titanium; X is halogen and R is an alkyl radical having 1-10 carbon atoms or a COR group. Among them, particularly preferred are titanium compounds having at least one Ti-halogen bond such as titanium tetrahalides or halogenalcoholates. Preferred specific titanium compounds are TiCl_3 , TiCl_4 , $\text{Ti}(\text{OBu})_4$, $\text{Ti}(\text{OBu})\text{Cl}_3$, $\text{Ti}(\text{OBu})_2\text{Cl}_2$, $\text{Ti}(\text{OBu})_3\text{Cl}$. Preferably

the contact is carried out by suspending the adduct in cold TiCl_4 (generally 0°C); then the so obtained mixture is heated up to $80\text{--}130^\circ\text{C}$ and kept at this temperature for 0.5-2 hours. After that the excess of TiCl_4 is removed and the solid component is recovered. The treatment with TiCl_4 can be carried out one or more times. As mentioned above, also a steromodulating electron donor compound can be added to the solid catalyst component in order to make it stereospecific. The introduction of the electron donor can be done simultaneously with the reaction between transition metal compound and the adduct. As a result of this contact the electron donor compound normally remains deposited on the catalyst component. Said electron donor compound can be same as, or different from, the LB compound mentioned above and is generally selected from esters, ethers, amines, and ketones. In particular, as mentioned above, excellent results have been obtained with the use of 1,3-diethers of formula (I)




where R^{I} and R^{II} are the same or different and are hydrogen or linear or branched $\text{C}_1\text{--C}_{18}$ hydrocarbon groups which can also form one or more cyclic structures; R^{III} groups, equal or different from each other, are hydrogen or $\text{C}_1\text{--C}_{18}$ hydrocarbon groups; R^{IV} groups equal or different from each other, have the same meaning of R^{III} except that they cannot be hydrogen; each of R^{I} to R^{IV} groups can contain heteroatoms selected from halogens, N, O, S and Si.

Preferably, R^{IV} is a 1-6 carbon atom alkyl radical and more particularly a methyl while the R^{III} radicals are preferably hydrogen. Moreover, when R^{I} is methyl, ethyl, propyl, or isopropyl, R^{II} can be ethyl, propyl, isopropyl, butyl, isobutyl, tert-butyl, isopentyl, 2-ethylhexyl, cyclopentyl, cyclohexyl, methylcyclohexyl, phenyl or benzyl; when R^{I} is hydrogen, R^{II} can be ethyl, butyl, sec-butyl, tert-butyl, 2-ethylhexyl, cyclohexylethyl, diphenylmethyl, p-chlorophenyl, 1-naphthyl, 1-decahydronaphthyl; R^{I} and R^{II} can also be the same and can be ethyl, propyl, isopropyl, butyl, isobutyl, tert-butyl, neopentyl, phenyl, benzyl, cyclohexyl, cyclopentyl.


Specific examples of ethers that can be advantageously used include: 2-(2-ethylhexyl)-1,3-dimethoxypropane, 2-isopropyl-1,3-dimethoxypropane, 2-butyl-1,3-dimethoxypropane, 2-sec-butyl-1,3-dimethoxypropane, 2-cyclohexyl-1,3-dimethoxypropane, 2-phenyl-1,3-dimethoxypropane, 2-tert-butyl-1,3-dimethoxypropane, 2-cumyl-1,3-dimethoxypropane, 2-(2-phenylethyl)-1,3-dimethoxypropane, 2-(2-cyclohexylethyl)-1,3-dimethoxypropane, 2-(p-chlorophenyl)-1,3-dimethoxypropane, 2-(diphenylmethyl)-1,3-dimethoxypropane, 2-(1-naphthyl)-1,3-dimethoxypropane, 2-(p-fluorophenyl)-1,3-dimethoxypropane, 2-(1-decahydronaphthyl)-1,3-dimethoxypropane, 2-(p-tert-butylphenyl)-1,3-dimethoxypropane, 2,2-dicyclohexyl-1,3-dimethoxypropane, 2,2-diethyl-1,3-dimethoxypropane, 2,2-dipropyl-1,3-dimethoxypropane, 2,2-dibutyl-1,3-dimethoxypropane, 2,2-diethyl-1,3-diethoxypropane, 2,2-dicyclopentyl-1,3-dimethoxypropane, 2,2-dipropyl-1,3-diethoxypropane, 2,2-dibutyl-1,3-diethoxypropane, 2-methyl-2-ethyl-1,3-dimethoxypropane, 2-methyl-2-propyl-1,3-dimethoxypropane, 2-methyl-2-benzyl-1,3-dimethoxypropane, 2-methyl-2-phenyl-1,3-dimethoxypropane, 2-methyl-2-cyclohexyl-1,3-dimethoxypropane, 2-methyl-2-methylcyclohexyl-1,3-dimethoxypropane, 2,2-bis(p-chlorophenyl)-1,3-dimethoxypropane, 2,2-bis(2-phenylethyl)-1,3-dimethoxypropane, 2,2-bis(2-cyclohexylethyl)-1,3-dimethoxypropane, 2-methyl-2-isobutyl-1,3-dimethoxypropane, 2-methyl-2-(2-ethylhexyl)-1,3-dimethoxypropane, 2,2-bis(2-ethylhexyl)-1,3-dimethoxypropane, 2,2-bis(p-methylphenyl)-1,3-dimethoxypropane, 2-methyl-2-isopropyl-1,3-dimethoxypropane, 2,2-diisobutyl-1,3-dimethoxypropane, 2,2-diphenyl-1,3-dimethoxypropane, 2,2-dibenzyl-1,3-dimethoxypropane, 2-isopropyl-2-cyclopentyl-1,3-dimethoxypropane, 2,2-bis(cyclohexylmethyl)-1,3-dimethoxypropane, 2,2-diisobutyl-1,3-diethoxypropane, 2,2-diisobutyl-1,3-dibutoxypropane, 2-isobutyl-2-isopropyl-1,3-dimethoxypropane, 2,2-di-sec-butyl-1,3-dimethoxypropane, 2,2-di-tert-butyl-1,3-dimethoxypropane, 2,2-dineopentyl-1,3-dimethoxypropane, 2-iso-propyl-2-isopentyl-1,3-dimethoxypropane, 2-phenyl-2-benzyl-1,3-dimethoxypropane, 2-cyclohexyl-2-cyclohexylmethyl-1,3-dimethoxypropane.

Furthermore, particularly preferred are the 1,3-diethers of formula (II)

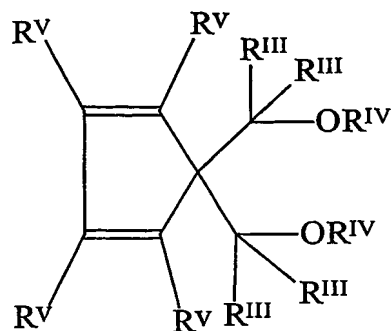

(II)

where the radicals R^{IV} have the same meaning explained above and the radicals R^{III} and R^V radicals, equal or different to each other, are selected from the group consisting of hydrogen; halogens, preferably Cl and F; C_1 - C_{20} alkyl radicals, linear or branched; C_3 - C_{20} cycloalkyl, C_6 - C_{20} aryl, C_7 - C_{20} alkaryl and C_7 - C_{20} aralkyl radicals and two or more of the R^V radicals can be bonded to each other to form condensed cyclic structures, saturated or unsaturated, optionally substituted with R^{VI} radicals selected from the group consisting of halogens, preferably Cl and F; C_1 - C_{20} alkyl radicals, linear or branched; C_3 - C_{20} cycloalkyl, C_6 - C_{20} aryl, C_7 - C_{20} alkaryl and C_7 - C_{20} aralkyl radicals; said radicals R^V and R^{VI} optionally containing one or more heteroatoms as substitutes for carbon or hydrogen atoms, or both. Preferably, in the 1,3-diethers of formulae (I) and (II) all the R^{III} radicals are hydrogen, and all the R^{IV} radicals are methyl. Moreover, are particularly preferred the 1,3-diethers of formula (II) in which two or more of the R^V radicals are bonded to each other to form one or more condensed cyclic structures, preferably benzenic, optionally substituted by R^{VI} radicals. Especially preferred are the compounds of formula (III):

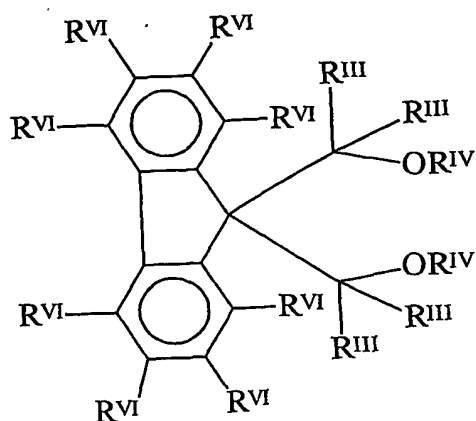

(III)

where the R^{VI} radicals equal or different are hydrogen; halogens, preferably Cl and F; C_1 - C_{20} alkyl radicals, linear or branched; C_3 - C_{20} cycloalkyl, C_6 - C_{20} aryl, C_7 - C_{20} alkylaryl and C_7 - C_{20} aralkyl radicals, optionally containing one or more heteroatoms selected from the group consisting of N, O, S, P, Si and halogens, in particular Cl and F, as substitutes for carbon or hydrogen atoms, or both; the radicals R^{III} and R^{IV} are as defined above for formula (II). Specific examples of compounds comprised in formulae (II) and (III) are:

1,1-bis(methoxymethyl)-cyclopentadiene; 1,1-bis(methoxymethyl)-2,3,4,5-tetramethylcyclopentadiene; 1,1-bis(methoxymethyl)-2,3,4,5-tetraphenylcyclopentadiene; 1,1-bis(methoxymethyl)-2,3,4,5-tetrafluorocyclopentadiene; 1,1-bis(methoxymethyl)-3,4-dicyclopentylcyclopentadiene; 1,1-bis(methoxymethyl)indene; 1,1-bis(methoxymethyl)-2,3-dimethylindene; 1,1-bis(methoxymethyl)-4,5,6,7-tetrahydroindene; 1,1-bis(methoxymethyl)-2,3,6,7-tetrafluoroindene; 1,1-bis(methoxymethyl)-4,7-dimethylindene; 1,1-bis(methoxymethyl)-3,6-dimethylindene; 1,1-bis(methoxymethyl)-4-phenylindene; 1,1-bis(methoxymethyl)-4-phenyl-2-methylindene; 1,1-bis(methoxymethyl)-4-cyclohexylindene; 1,1-bis(methoxymethyl)-7-(3,3,3-trifluoropropyl)indene; 1,1-bis(methoxymethyl)-7-trimethylsilylindene; 1,1-bis(methoxymethyl)-7-trifluoromethylindene; 1,1-bis(methoxymethyl)-4,7-dimethyl-4,5,6,7-tetrahydroindene; 1,1-bis(methoxymethyl)-7-methylindene; 1,1-bis(methoxymethyl)-7-cyclopentylindene; 1,1-bis(methoxymethyl)-7-isopropylindene; 1,1-bis(methoxymethyl)-7-cyclohexylindene; 1,1-bis(methoxymethyl)-7-tert-butylindene; 1,1-bis(methoxymethyl)-7-tert-butyl-2-methylindene; 1,1-bis(methoxymethyl)-7-phenylindene; 1,1-bis(methoxymethyl)-2-phenylindene; 1,1-bis(methoxymethyl)-1H-

benz[e]indene; 1,1-bis(methoxymethyl)-1H-2-methylbenz[e]indene; 9,9-bis(methoxymethyl)fluorene; 9,9-bis(methoxymethyl)-2,3,6,7-tetramethylfluorene; 9,9-bis(methoxymethyl)-2,3,4,5,6,7-hexafluorofluorene; 9,9-bis(methoxymethyl)-2,3-benzofluorene; 9,9-bis(methoxymethyl)-2,3,6,7-dibenzofluorene; 9,9-bis(methoxymethyl)-2,7-diisopropylfluorene; 9,9-bis(methoxymethyl)-1,8-dichlorofluorene; 9,9-bis(methoxymethyl)-2,7-dicyclopentylfluorene; 9,9-bis(methoxymethyl)-1,8-difluorofluorene; 9,9-bis(methoxymethyl)-1,2,3,4-tetrahydrofluorene; 9,9-bis(methoxymethyl)-1,2,3,4,5,6,7,8-octahydrofluorene; 9,9-bis(methoxymethyl)-4-tert-butylfluorene.

The catalyst components obtained by using these diethers in fact has shown excellent properties in terms of polymerization activity, stereospecificity and morphological stability even if they were obtained by contacting the titanium compound and the 1,3-diether with Lewis adducts deriving from original $\text{MgCl}_2(\text{EtOH})_m$ adducts in which m is from 0.15 to 1.7 that have been in turn obtained by partial dealcoholation of adducts with a higher alcohol content. While we do not intend being bound to any theoretical interpretation, it is believed that the presence of the LB compound in the adduct of the invention, possibly partially dealcoholated, acts in such a way that the interaction of the electron donor compound with the other constituents of the catalyst component becomes more effective.

Suitable electron donors are also the alkyl and aryl esters of mono or polycarboxylic acids such as for example esters of benzoic, phthalic, malonic, glutaric and succinic acid are preferred. Specific examples of such esters are n-butylphthalate, di-isobutylphthalate, di-n-octylphthalate, diethyl 2,2-diisopropylsuccinate, diethyl 2,2-dicyclohexyl-succinate, ethylbenzoate and p-ethoxy ethylbenzoate.

The electron donor compound is generally present in molar ratios with respect to the magnesium comprised between 1:4 and 1:20.

Preferably, the particles of the solid catalyst components have substantially spherical morphology and an average diameter comprised between 5 and 150 μm . With the term substantial spherical morphology are meant those particles having a ratio between the greater and smaller axis equal to or lower than 1.5 and preferably lower than 1.3.

The solid catalyst components according to the present invention show a surface area (by B.E.T. method) generally between 10 and 500 m^2/g and preferably between 20 and 350 m^2/g , and a total porosity (by B.E.T. method) higher than 0.15 cm^3/g preferably between 0.2 and 0.6 cm^3/g .

The catalyst components of the invention form catalysts for the polymerization of alpha-olefins $\text{CH}_2=\text{CHR}$, wherein R is hydrogen or a hydrocarbon radical having 1-12 carbon atoms, by reaction or contact with organo-Al compounds in particular Al-alkyl compounds. The alkyl-Al compound is preferably chosen among the trialkyl aluminum compounds such as for example triethylaluminum, triisobutylaluminum, tri-n-butylaluminum, tri-n-hexylaluminum, tri-n-octylaluminum. It is also possible to use alkylaluminum halides, alkylaluminum hydrides or alkylaluminum sesquichlorides such as AlEt_2Cl and $\text{Al}_2\text{Et}_3\text{Cl}_3$ optionally in mixture with said trialkyl aluminum compounds..

The Al/Ti ratio is higher than 1 and is generally comprised between 20 and 800.

In the case of the stereoregular polymerization of α -olefins such as for example propylene and 1-butene, an electron donor compound (external donor) which can be the same or different from the compound used as internal donor can be used in the preparation of the catalysts disclosed above. In case the internal donor is an ester of a polycarboxylic acid, in particular a phthalate, the external donor is preferably selected from the silane compounds containing at least a Si-OR link, having the formula $\text{R}_a^1\text{R}_b^2\text{Si}(\text{OR}^3)_c$, where a and b are integer from 0 to 2, c is an integer from 1 to 3 and the sum (a+b+c) is 4; R^1 , R^2 , and R^3 , are alkyl, cycloalkyl or aryl radicals with 1-18 carbon atoms. Particularly preferred are the silicon compounds in which a is 1, b is 1, c is 2, at least one of R^1 and R^2 is selected from branched alkyl, cycloalkyl or aryl groups with 3-10 carbon atoms and R^3 is a C_1 - C_{10} alkyl group, in particular methyl. Examples of such preferred silicon compounds are methylcyclohexyldimethoxysilane, diphenyldimethoxysilane, methyl-t-butyldimethoxysilane, dicyclopentyldimethoxysilane. Moreover, are also preferred the silicon compounds in which a is 0, c is 3, R^2 is a branched alkyl or cycloalkyl group and R^3 is methyl. Examples of such preferred silicon compounds are cyclohexyltrimethoxysilane, t-butytrimethoxysilane and hexyltrimethoxysilane.

Also the 1,3 diethers having the previously described formula can be used as external donor. However, in the case 1,3-diethers are used as internal donors, the use of an external donor can be avoided, as the stereospecificity of the catalyst is already sufficiently high.

As previously indicated the components of the invention and catalysts obtained therefrom find applications in the processes for the (co)polymerization of olefins of formula $\text{CH}_2=\text{CHR}$ in which R is hydrogen or a hydrocarbon radical having 1-12 carbon atoms.

The catalysts of the invention can be used in any of the olefin polymerization processes known in the art. They can be used for example in slurry polymerization using as diluent an inert hydrocarbon solvent or bulk polymerization using the liquid monomer (for example propylene)

as a reaction medium. Moreover, they can also be used in the polymerization process carried out in gas-phase operating in one or more fluidized or mechanically agitated bed reactors.

The polymerization is generally carried out at temperature of from 20 to 120°C, preferably of from 40 to 80°C. When the polymerization is carried out in gas-phase the operating pressure is generally between 0.1 and 10 MPa, preferably between 1 and 5 MPa. In the bulk polymerization the operating pressure is generally between 1 and 6 MPa preferably between 1.5 and 4 MPa.

The catalysts of the invention are very useful for preparing a broad range of polyolefin products. Specific examples of the olefinic polymers which can be prepared are: high density ethylene polymers (HDPE, having a density higher than 0.940 g/cc), comprising ethylene homopolymers and copolymers of ethylene with alpha-olefins having 3-12 carbon atoms; linear low density polyethylenes (LLDPE, having a density lower than 0.940 g/cc) and very low density and ultra low density (VLDPE and ULDPE, having a density lower than 0.920 g/cc, to 0.880 g/cc) consisting of copolymers of ethylene with one or more alpha-olefins having from 3 to 12 carbon atoms, having a mole content of units derived from the ethylene higher than 80%; isotactic polypropylenes and crystalline copolymers of propylene and ethylene and/or other alpha-olefins having a content of units derived from propylene higher than 85% by weight; copolymers of propylene and 1-butene having a content of units derived from 1-butene comprised between 1 and 40% by weight; heterophasic copolymers comprising a crystalline polypropylene matrix and an amorphous phase comprising copolymers of propylene with ethylene and or other alpha-olefins.

The following examples are given to illustrate and not to limit the invention itself.

CHARACTERIZATION

Determination of alcohol content

The ethanol and ROH content are determined via GC analysis.

Determination of X.I.

2.5 g of polymer were dissolved in 250 ml of o-xylene under stirring at 135°C for 30 minutes, then the solution was cooled to 25°C and after 30 minutes the insoluble polymer was filtered. The resulting solution was evaporated in nitrogen flow and the residue was dried and weighed to determine the percentage of soluble polymer and then, by difference the xylene insoluble fraction (%).

EXAMPLES

General procedure for the preparation of $\text{MgCl}_2 \cdot (\text{EtOH})_m$ adducts

An initial amount of microspheroidal $\text{MgCl}_2 \cdot 2.8\text{C}_2\text{H}_5\text{OH}$ was prepared according to the method described in ex.2 of USP 4,399,054 but operating at 3,000 rpm instead of 10,000. Each of the specific $\text{MgCl}_2 \cdot (\text{EtOH})_m$ adducts reported in table 1 and used to prepare the adducts of the invention, were then prepared by subjecting to thermal dealcoholation an aliquot of the initial microspheroidal $\text{MgCl}_2 \cdot 2.8\text{C}_2\text{H}_5\text{OH}$ adduct. The thermal dealcoholation was carried out at increasing temperatures from 30 to 130°C and operating in nitrogen current until the specified value of "m" reported in table 1 was obtained.

General preparation of $\text{MgCl}_2 \cdot (\text{EtOH})_m(\text{LB})_n$

Into a 5 L glass reactor, purged with nitrogen, equipped with a mechanical stirrer and a thermometer, 3600 mL of anhydrous hexane were introduced at room temperature. While stirring, 180g of microspheroidal $\text{MgCl}_2(\text{ROH})_m$ adduct prepared according to the general procedure reported above were added. A certain amount of the selected Lewis Base (not used in comparison examples 13-16) dissolved in 300cc of hexane is slowly added to the slurry, at room temperature, under stirring, in 30 minutes. The amount of Lewis Base is reported as Mg/LB molar ratio in table 1. The suspension was heated up, in 30 minutes, to a specific temperature (see table 1) and reacted under stirring for 3 hours. After the reacting time the solid adduct was allowed settling and the supernatant liquid is siphoned off. Finally the $\text{MgCl}_2 \cdot (\text{ROH})_m(\text{LB})_n$ adduct was washed two times with hexene and dried under vacuum at 40°C.

Preparation of solid catalyst component general procedure A.

Into a 2 L four-necked glass reactor, equipped with a mechanical stirrer and a thermometer, purged with nitrogen, 1500 mL of TiCl_4 were introduced and cooled at 0 °C. While stirring, 60 g of microspheroidal adduct prepared above were added. Subsequently an amount of diisobutylphthalate corresponding to 0,125 moles per mole of Mg, were added to the suspension. The temperature was raised to 100°C and maintained for 120 min. Then, the stirring was discontinued, the solid product was allowed to settle at 100°C for 15 minutes and the supernatant liquid was siphoned off.

Once again 1500 mL of fresh TiCl_4 were added on the solid product. The mixture was reacted at 120°C for 60 min and than the stirring was stopped. The solid product was allowed to settle at 120°C for 15 min and the supernatant liquid was siphoned off. The solid was washed with hexene three times at 50°C, three more times at room temperature and finally was dried under vacuum at 40°C.

Preparation of solid catalyst component general procedure B.

Into a 2 L four-necked glass reactor, equipped with a mechanical stirrer and a thermometer, purged with nitrogen, 1500 mL of TiCl_4 were introduced and cooled at 0 °C. While stirring, 75 g of microspheroidal adduct prepared above were added. Subsequently an amount of 9,9-bis(methoxymethyl)fluorene corresponding to 0,200 moles per mole of Mg, were added to the suspension. The temperature was raised to 100°C and maintained for 60 min. Then, the stirring was discontinued, the solid product was allowed to settle at 65°C for 15 minutes and the supernatant liquid was siphoned off.

Then 1500 mL of fresh TiCl_4 were added on the solid product. The mixture was reacted at 110°C for 30 min and then the stirring was stopped and the reactor cooled to 65°C; the solid product was allowed to settle at 65°C for 15 min and the supernatant liquid was siphoned off.

Once again, 1500 mL of fresh TiCl_4 were added on the solid product. The mixture was reacted at 110°C for 30 min and then the stirring was stopped and the reactor cooled to 65°C; the solid product was allowed to settle at 65°C for 15 min and the supernatant liquid was siphoned off.

The solid was washed with hexene three times at 50°C, three more times at room temperature and finally was dried under vacuum at 40°C.

Propylene general polymerization procedure for solid catalyst component obtained from general procedure A

In a 4-liter autoclave, purged with nitrogen flow at 70 °C for two hours, 75 ml of anhydrous hexane containing 760mg of AlEt_3 , 63 mg of cyclohexylmethyldimethoxysilane and 10 mg of solid catalyst component were introduced in propylene flow at 30 °C. The autoclave was closed. 1.5 Nl of hydrogen were added and then, under stirring, 1.2 Kg of liquid propylene were fed. The temperature was raised to 70°C in five minutes and the polymerization was carried out at this temperature for two hours. The non-reacted propylene was removed, the polymer was recovered and dried at 70 °C under vacuum for three hours and then weighed and analyzed for the determination of the Mg residues by which the activity of the catalyst is calculated.

Propylene general polymerization procedure for solid catalyst component obtained from general procedure B

In a 4-liter autoclave, purged with nitrogen flow at 70 °C for two hours, 75 ml of anhydrous hexane containing 600mg of AlEt_3 , and 6 mg of solid catalyst component were introduced in propylene flow at 30 °C. The autoclave was closed. 1.0 Nl of hydrogen were added and then, under stirring, 1.2 Kg of liquid propylene were fed. The temperature was raised to 70°C in five minutes and the polymerization was carried out at this temperature for two

hours. The non-reacted propylene was removed, the polymer was recovered and dried at 70 °C under vacuum for three hours and then weighed and analyzed for the determination of the Mg residues by which the activity of the catalyst is calculated.

Examples 1-12 and comparison examples 13-16

Preparation of $\text{MgCl}_2 \bullet (\text{EtOH})_m (\text{LB})_n$ adducts

All the adducts were prepared according to the general preparation procedure described above.

Examples 17-31 and comparison examples 32-38

Catalyst preparation.

Each catalyst was prepared by following the general preparation procedure A or B as reported in table 2.

Polymerization

Depending on the relevant catalyst preparation procedure used, each catalyst was then tested in the polymerization test A or B as described above. The results are shown in table 2.

Table 1

Ex.	$\text{MgCl}_2 \bullet (\text{ROH})_m (\text{H}_2\text{O})_p$		Synthesis Conditions			Support analysis				
	<i>m</i>	<i>P</i>	<i>LB</i>	<i>Mg/LB</i> (mol/mol)	<i>T</i> (°C)	<i>Mg</i> (Wt%)	<i>LB</i> (Wt%)	<i>EtOH</i> (Wt%)	<i>LB/Mg</i> (mol/mol)	<i>EtOH/Mg</i> (mol/mol)
1	1,2	0,15	DIPS	1,25	58	14,0	8,3	30,9	0,1	1,2
2	1,2	0,15	EA	1,25	58	15,3	5,8	33,4	0,1	1,1
3	1,2	0,15	EA	0,90	25	15,4	5,7	33,8	0,1	1,1
4	1,2	0,15	Acetone	2,50	25	15,2	4,4	31,5	0,1	1,1
5	0,7	0,16	THF	0,77	58	12,7	37,1	14,9	1,0	0,6
6	0,7	0,16	THF	2,50	50	16,9	15,7	21,0	0,3	0,6
7	0,7	0,16	THF	1,25	58	13,6	29,5	17,3	0,7	0,7
8	1,2	0,15	THF	1,25	58	13,1	22,9	27,7	0,6	1,1
9	1,8	0,14	THF	1,25	58	12,0	16,4	41,0	0,5	1,8
10	1,2	0,15	THF	1,25	50	13,8	17,8	29,2	0,4	1,1
11	1,8	0,14	THF	2,50	58	12,9	4,3	43,9	0,1	1,8

12	2,2	0,15	THF	1,25	58	10,9	17,3	45,9	0,5	2,2
13*	0,7	0,16	-	-	-	18,8	-	24,0	-	0,7
14*	1,2	0,15	-	-	-	16,0	-	35,5	-	1,2
15*	1,8	0,14	-	-	-	13,6	-	45,2	-	1,8
16*	2,2	0,15	-	-	-	12,3	-	50,6	-	2,2

(*)= comparison example

DIPS= diethyl 2,3-diisopropylsuccinate

EA= Ethylacetate

THF= Tetrahydrofurane

Table 2

Ex.	Catalyst synthesis		Catalyst composition				Catalyst performances		
	Adduct of Ex	Preparation Procedure	Ti (Wt%)	Mg (Wt%)	Cl (Wt%)	I. D. (Wt%)	Yield (Kg _{pol} /g _{cat})	X.I. (Wt%)	BDP (g/cm ³)
17	1	A	3,6	17,8	61,4	5,0	23,0	97,2	0,432
18	2	B	3,8	16,8	60,0	8,4	32,0	84,8	0,409
19	3	A	2,8	19,5	65,0	8,4	37,0	96,9	0,420
20	4	A	2,8	19,9	67,7	7,6	38,0	97	0,392
21	5	A	2,6	18,9	64,3	10,3	59,1	97,8	0,431
22	6	A	4,3	17,8	64,2	2,7	17,3	97,0	0,409
23	7	A	2,7	15,7	54,0	15,1	32,0	97,4	0,451
24	8	A	3,2	19,6	65,0	6,7	65,3	98,4	0,348
25	9	A	2,9	16,8	56,8	12,6	56,1	97,9	0,450
26	6	B	1,6	16,4	53,0	7,3	9,3	94,3	-
27	7	B	2,4	19,3	63,6	7,4	55,2	96,9	0,442
28	10	B	3,7	15,8	55,2	10,6	49,5	92,7	0,410
29	8	B	3,8	15,2	54,4	11,7	66,1	95,6	0,379
30	9	B	4,1	15,0	53,3	16,1	107,2	97,8	0,445
31	12	B	4,3	14,4	52,7	18,1	107,6	97,6	0,382
32*	13	A	3,3	56,7	55,1	14,8	10,3	93,2	-
33*	14	A	2,4	20,6	66,1	5,3	25,1	95,8	0,357
34*	15	A	3,2	18,7	63,9	9,9	41,6	97,5	0,436
35*	13	B	2,2	18,9	61,5	3,8	6,4	75,3	-


36*	14	B	6,0	16,4	61,7	11,7	24,1	73,0	-
37*	15	B	5,3	15,6	58,2	7,2	62,3	92,5	0,408
38*	16	B	4,9	15,4	59,2	10,6	88,9	96,0	0,403

(*) comparison example

CLAIMS

1. Solid Lewis adducts comprising MgCl_2 , a Lewis base (LB) belonging to ethers, esters, ketones, silanes or amines and an alcohol ROH, in which R is a C1-C15 hydrocarbon group optionally substituted with heteroatoms containing groups, which compounds are in molar ratios to each other defined by the following formula $\text{MgCl}_2(\text{ROH})_m(\text{LB})_n$ in which m ranges from 0.05 to 6, n ranges from 0.08 to 6.
2. The solid adducts according to claim 1 in which the LB is selected from ethers, esters or ketones.
3. The solid adducts according to claim 2 in which the LB is selected from esters or ethers.
4. The solid adducts according to claim 3 in which the ethers are the C2-C20 aliphatic ethers.
5. The solid adducts according to claim 4 in which the ethers are cyclic ethers having 3-5 carbon atoms.
6. The solid adducts according to claim 5 in which the ether is tetrahydrofuran.
7. The solid adducts according to claim 3 in which the esters are alkyl esters of C1-C10 aliphatic carboxylic acids.
8. The solid adducts according to claim 1 in which the R groups are C1-C10 saturated hydrocarbon groups.
9. The solid adducts according to claim 8 in which the R groups are methyl, ethyl and C3-C8 alkyl groups.
10. The solid adducts according to claim 1 in which the ROH alcohol is ethanol.
11. The solid adducts according to claim 1 in which m ranges from 0.1 to 4.5 and n ranges from 0.07 to 3.
12. The solid adducts according to claim 1 in which m ranges from 0.5 to 4 and n ranges from 0.1 to 2.5.
13. The solid Lewis adduct according to claim 1 containing also water in a molar ratio defined by the formula $\text{MgCl}_2(\text{ROH})_m(\text{LB})_n(\text{H}_2\text{O})_p$ in which the index p ranges from 0.01 to 0.6.
14. Process for preparing the solid Lewis adduct of claim 1 comprising (i) contacting MgCl_2 , ROH and LB optionally in the presence of an inert liquid diluent, (ii) heating the system up to the melting temperature of the mixture and maintaining said conditions so as to obtain a completely molten adduct and (iii) rapidly cooling the molten adduct thereby obtaining its solidification.


15. Process for preparing the solid Lewis adduct of claim 1 comprising contacting the LB compound with a preformed solid $\text{MgCl}_2(\text{ROH})_m$ adduct in which R and m have the same meanings given in claim 1.
16. The process according to claim 15 in which the $\text{MgCl}_2(\text{ROH})_m$ adduct derives from a starting adduct in which part of the alcohol has been removed by physical or chemical dealcoholation.
17. The process according to claim 15 in which the LB compound is in vapor phase.
18. The process according to claim 16 in which m is from 0.15 to 1.7.
19. Catalyst components obtained by contacting a solid adducts according to anyone of claims 1-18 with compounds of transition metals belonging to one of the groups 4 to 6 of the Periodic Table of Elements (new notation).
20. The catalyst components according to claim 19 in which the transition metal compound is selected from titanium compounds of formula $\text{Ti}(\text{OR})_n\text{X}_{y-n}$ in which n is comprised between 0 and y; y is the valence of titanium; X is halogen and R is an alkyl radical having 1-10 carbon atoms or a COR group.
21. The catalyst components according to claim 19 in which the transition metal compound is selected from TiCl_3 , TiCl_4 , $\text{Ti}(\text{OBu})_4$, $\text{Ti}(\text{OBu})\text{Cl}_3$, $\text{Ti}(\text{OBu})_2\text{Cl}_2$, $\text{Ti}(\text{OBu})_3\text{Cl}$.
22. The catalyst components according to claim 19 further containing an electron donor selected from esters, ethers, amines, and ketones.
23. The catalyst component according to claim 19 in which the electron donor is selected from 1,3-diethers of formula (I)



where R^{I} and R^{II} are the same or different and are hydrogen or linear or branched $\text{C}_1\text{-C}_{18}$ hydrocarbon groups which can also form one or more cyclic structures; R^{III} groups, equal or different from each other, are hydrogen or $\text{C}_1\text{-C}_{18}$ hydrocarbon groups; R^{IV} groups equal or different from each other, have the same meaning of R^{III} except that they cannot be hydrogen; each of R^{I} to R^{IV} groups can contain heteroatoms selected

from halogens, N, O, S and Si.

24. The catalyst component according to claim 19 in which the electron donor is selected from 1,3-diethers of formula (III)

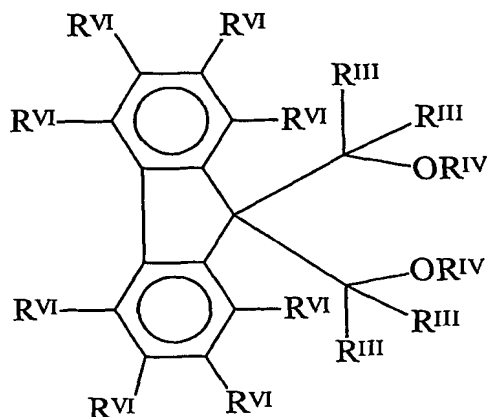

(III)

- where the R^{VI} radicals equal or different are hydrogen; halogens, preferably Cl and F; C₁-C₂₀ alkyl radicals, linear or branched; C₃-C₂₀ cycloalkyl, C₆-C₂₀ aryl, C₇-C₂₀ alkylaryl and C₇-C₂₀ aralkyl radicals, optionally containing one or more heteroatoms selected from the group consisting of N, O, S, P, Si and halogens, in particular Cl and F, as substitutes for carbon or hydrogen atoms, or both; the radicals R^{III} and R^{IV} are as defined in claim 23.
25. The catalysts system for the polymerization of alpha-olefins CH₂=CHR, wherein R is hydrogen or a hydrocarbon radical having 1-12 carbon atoms, obtained by contacting a catalyst component according to anyone of the claims 19-24 with one or more organoaluminum compounds.
26. The catalyst system according to claim 25 in which the organoaluminum compound is an Al-alkyl compound.
27. The catalyst system according to claim 26 further containing an external electron donor compound.
28. Process for the polymerization of olefins carried out in the presence of a catalyst according to anyone of claims 25-27.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/13818

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B01J27/00 C08F4/651 C08F4/654 C08F10/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B01J C08F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 0171, no. 71 (C-1044), 2 April 1993 (1993-04-02) & JP 4 331210 A (CHISSO CORP), 19 November 1992 (1992-11-19) abstract	1-28
X	PATENT ABSTRACTS OF JAPAN vol. 0103, no. 39 (C-385), 15 November 1986 (1986-11-15) & JP 61 145207 A (MITSUBISHI PETROCHEM CO LTD), 2 July 1986 (1986-07-02) abstract ----- -/-	1-28

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

22 April 2004

Date of mailing of the international search report

04/05/2004

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Gamb, V

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/13818

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 717 052 A (APPRYL SNC) 19 June 1996 (1996-06-19) example 16 page 3, line 7 - line 8	1-9, 11-16, 19-22, 25-28
X	US 6 034 025 A (KIM MIE-OCK ET AL) 7 March 2000 (2000-03-07) examples 1-9 column 3, line 60 - line 64	1-6, 8-14, 19-22, 25-28
Y	claims 1,2,5,9,10	19-24
X	EP 1 083 187 A (CHINA PETROCHEMICAL CORP ; CHINA PETROCHEMICAL CORP BEIJI (CN)) 14 March 2001 (2001-03-14) examples 1-3,6-9 claims 1,3,4,6,8	1-6, 8-14, 19-22, 25-28
X	US 4 829 034 A (IISKOLAN EERO ET AL) 9 May 1989 (1989-05-09) examples 1,2 claims 1,2,4	1-3, 8-14, 19-21, 25-28
Y		14-18
Y	EP 0 395 083 A (HIMONT INC) 31 October 1990 (1990-10-31) cited in the application examples 1-6 claims 1,2,8	14-18
Y	EP 0 728 769 A (MONTELL NORTH AMERICA INC) 28 August 1996 (1996-08-28) cited in the application examples 1,5 claim 6	19-24
A	US 5 212 132 A (BRUN CLAUDE ET AL) 18 May 1993 (1993-05-18) examples 1,8,15,16 column 2, line 56 - line 63 claims 1,9,14	1-28

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/13818

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 4331210	A	19-11-1992	NONE	
JP 61145207	A	02-07-1986	JP 1973584 C JP 7000642 B	27-09-1995 11-01-1995
EP 0717052	A	19-06-1996	FR 2728181 A1 AT 175682 T CA 2165395 A1 CN 1131677 A ,B DE 69507276 D1 DE 69507276 T2 EP 0717052 A1 ES 2127984 T3 FI 956048 A JP 8337610 A NO 955030 A US 6221801 B1	21-06-1996 15-01-1999 17-06-1996 25-09-1996 25-02-1999 12-08-1999 19-06-1996 01-05-1999 17-06-1996 24-12-1996 17-06-1996 24-04-2001
US 6034025	A	07-03-2000	GB 2325004 A ,B IT MI980103 A1 JP 3022834 B2 JP 10316712 A	11-11-1998 09-11-1998 21-03-2000 02-12-1998
EP 1083187	A	14-03-2001	CN 1229092 A BR 9908977 A EP 1083187 A1 JP 2002506893 T WO 9947568 A1 US 6617278 B1	22-09-1999 14-11-2000 14-03-2001 05-03-2002 23-09-1999 09-09-2003
US 4829034	A	09-05-1989	FI 862459 A AT 394855 B AT 901687 A CH 671767 A5 DE 3790287 C2 DE 3790287 T EP 0279818 A1 WO 8707620 A1 GB 2199767 A ,B JP 7091330 B JP 63503550 T NL 191263 B NL 8720292 T NO 880350 A ,B, SE 458927 B SE 8800363 A	10-12-1987 10-07-1992 15-12-1991 29-09-1989 03-05-2001 23-06-1988 31-08-1988 17-12-1987 20-07-1988 04-10-1995 22-12-1988 16-11-1994 05-04-1988 27-01-1988 22-05-1989 05-02-1988
EP 0395083	A	31-10-1990	IT 1230134 B AT 160150 T AU 636142 B2 AU 5456990 A BR 9001991 A CA 2015685 A1 CN 1047302 A ,B CZ 9900469 A3 DD 298935 A5 DE 69031693 D1 DE 69031693 T2	14-10-1991 15-11-1997 22-04-1993 01-11-1990 13-08-1991 28-10-1990 28-11-1990 17-01-2001 19-03-1992 18-12-1997 14-05-1998

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/13818

Patent document cited in search report		Publication date	Patent family member(s)	Publication date		
EP 0395083	A		EP 1251141 A2	23-10-2002		
			EP 0395083 A2	31-10-1990		
			EP 0789037 A2	13-08-1997		
			ES 2110399 T3	16-02-1998		
			FI 103124 B1	30-04-1999		
			FI 970960 A	06-03-1997		
			HK 1004605 A1	27-11-1998		
			HU 62609 A2	28-05-1993		
			IL 94154 A	25-01-1994		
			JP 3016816 B2	06-03-2000		
			JP 3062805 A	18-03-1991		
			JP 3193360 B2	30-07-2001		
			JP 2000080121 A	21-03-2000		
			KR 177803 B1	15-05-1999		
			MX 20477 A	01-12-1993		
			NO 901912 A ,B,	29-10-1990		
			PL 284968 A1	13-01-1992		
			PL 165373 B1	30-12-1994		
			PL 165028 B1	30-11-1994		
			PT 93923 A ,B	20-11-1990		
			SK 74798 A3	14-02-2000		
			SK 210990 A3	11-01-1999		
			RU 2045537 C1	10-10-1995		
			US 5221651 A	22-06-1993		
			YU 82990 A1	31-10-1991		
			ZA 9003063 A	30-01-1991		
		EP 0728769	A	28-08-1996	IT MI950318 A1	21-08-1996
					IT MI950317 A1	21-08-1996
					AT 169937 T	15-09-1998
					AU 699522 B2	03-12-1998
AU 4559496 A	29-08-1996					
BR 9600767 A	23-12-1997					
CA 2169401 A1	22-08-1996					
CN 1143651 A ,B	26-02-1997					
DE 69600532 D1	24-09-1998					
DE 69600532 T2	18-03-1999					
EP 0728769 A1	28-08-1996					
ES 2121446 T3	16-11-1998					
FI 960786 A	22-08-1996					
HK 1010379 A1	07-04-2000					
HU 9600390 A2	28-04-1997					
IL 117114 A	17-02-2000					
IN 186169 A1	30-06-2001					
JP 9020803 A	21-01-1997					
NO 960669 A	22-08-1996					
RU 2156260 C2	20-09-2000					
ZA 9601292 A	27-08-1996					
US 5212132	A	18-05-1993	FR 2669915 A1	05-06-1992		
			AT 128439 T	15-10-1995		
			CA 2056791 A1	30-05-1992		
			CN 1062711 A ,B	15-07-1992		
			CN 1101352 A	12-04-1995		
			DE 69113408 D1	02-11-1995		
			DE 69113408 T2	02-05-1996		
			EP 0488856 A1	03-06-1992		
			ES 2078476 T3	16-12-1995		

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/13818

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5212132	A	FI 915626 A	30-05-1992
		JP 2588492 B2	05-03-1997
		JP 6220113 A	09-08-1994
		NO 914409 A	01-06-1992
		PT 99643 A ,B	30-10-1992
		US 6232422 B1	15-05-2001